


NOTES:

BY FOLLOWING THESE GUIDELINES DURING THE INSTALLATION PROCESS THE POTENTIAL FOR PIPE "SNAKING" OR PULLING OUT OF THE CONNECTOR IS VIRTUALLY ELIMINATED.

1. INSTALL AND SECURE PLASTIC PIPE NR. 1 ONTO THE SUPPORT PIPE.
2. INSTALL PIPE CONNECTOR NR. 1 ONTO THE PLASTIC PIPE NR. 1 UNTIL IT STOPS.
3. INSTALL PLASTIC PIPE NR. 2 UNTIL IT STOPS.
4. GRIP AND PULL PIPE CONNECTOR NR.1 AWAY FROM PLASTIC PIPE NR. 1 A DISTANCE OF 1/4" OR 6 MM.
5. GRIP AND HOLD IN POSITION PIPE CONNECTOR NR.1 AND THEN PULL BACK PLASTIC PIPE NR. 2 A DISTANCE OF 1/4" OR 6 MM.
6. INSTALL AND SECURE PLASTIC PIPE NR. 2 ONTO THE SUPPORT PIPE. REPEAT THE ABOVE PROCESS TO THE END OF THE DRINKER LINE.

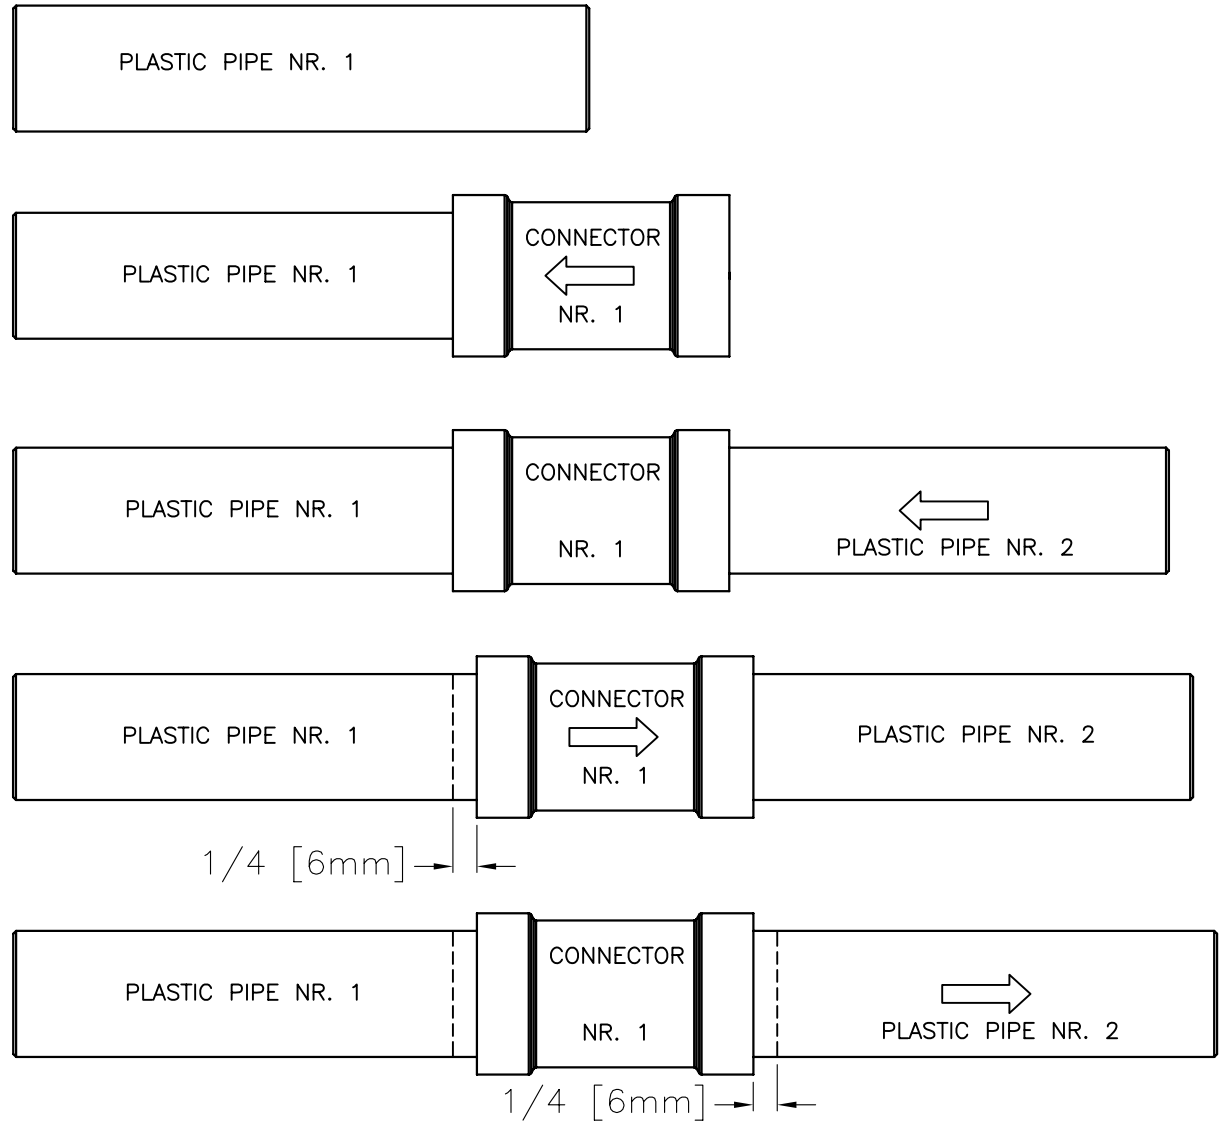

PIPE & PIPE CONNECTOR
INSTALLATION SHEET

PART NR.:

DATE: 04-11-01

REVISION: 1

GL1002